621.885.6:621.643:006.354 &

24136—80 Pipe-line fastening parts.

Four-seat cramps.
Design and dimensions

4

16690—71


01.01.9f

12 8001

25 **»** 1980 . 1891 <u>- 01 01.8</u> 1985 . 16.10.85 3332

1.

**50** 2.

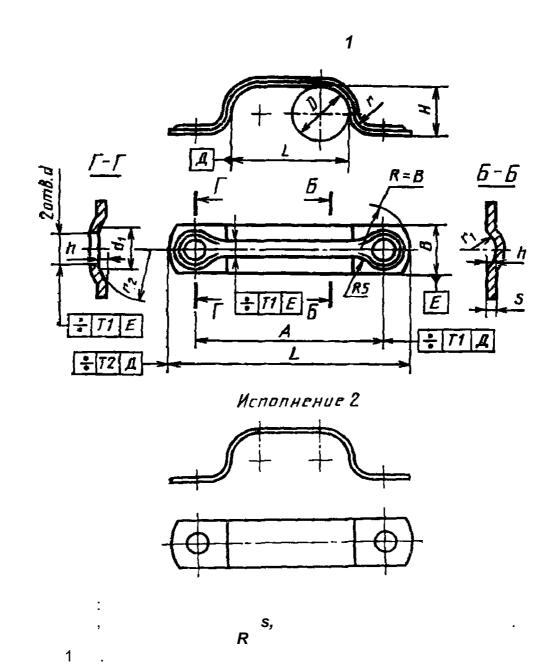

								,									
D	±0,5	BXS -			L	d 14	dy	h	ı		r		f 2	1000 "		*	
		1	2			14			%	<sub>á</sub> 5,				1	2	1	2
4	34	16X1,0	16X2	3	50	5,8	9	1,0	16					6,2	12,4		
5	37			4	53				20		3			6,7	13		
6	44			5	60				24	0,6		2	10	7,5	15,0		
.8	50			6	66				32					8,5	17,0		
J0	58			8	74				40					10,1	20,2		
12	66			10	82				48					11,5	23,0		

**16** 

1. 2.

D	±0.5	BXS _			L	<b>d</b> 14	d,	h	1			,		1000 "		*	
		1	2						٠	٠.				/	2	1	2
14	80	18X1,6		12	98				56			3	10	24,9	46,6		
16	88		18X3	14	106	7,0	10		64					27,4	51,2		
18	96			16	114	7,0	10		72	0,6				29,9	55,9		
20	110			18	128			1,4	85					33,8	63,2		
22	125	22X1,6	22X3	20	147	9,0	14		90					46,7	87,3		
25	140			22	162				105					51,8	96,9		
28	150			24	172				115					55,3	103,4		
32	165			28	187				130	1,0				61,1	114,2		
36	180			32	202				145					66,8	124,9		
40	200	30X2,0	30X3	35	230				165					129,8	194,7		
45	220			40	250			2,0	185					142,1	213,1		
50	240			45	270				205						234,0		

9. : 
$$1 D = 20$$
 20 20 . : 
$$1-20-20-9. \qquad 24136-80$$
 12 18 10 . .: 
$$2-20-12 \ 18 - \qquad . \qquad 24136-80$$
 3. 
$$- \qquad 24140-80.$$